


### STEP 10

Attach seat to glider tube by inserting pin (VII) through hole and locking it into place by sliding on the clip spring (VI)

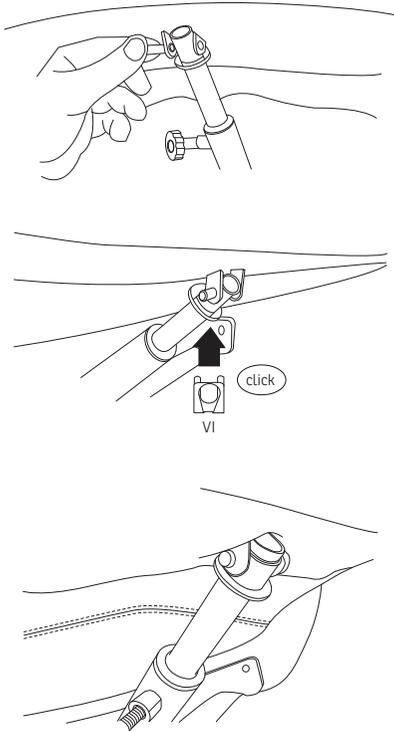

### CONGRATULATIONS YOUR CHAIR IS READY TO ENJOY.

NB : Please check bolts for tightness every six months or as needed.



## SAFETY INSTRUCTIONS

### GENERAL WARNINGS:

Never drag furniture when moving it, always lift it. Periodically check all fixings to ensure none have come loose and re-tighten where necessary. Please take care when handling or moving the furniture as careless handling may cause damage or injury. Furniture can be dangerous if incorrectly installed. Assembly should be carried out by a competent person. No liability will be accepted for damage or injury caused by incorrectly installed or assembled furniture.

### SPECIFIC WARNINGS FOR HEAVY ITEMS:

It is recommended that before moving heavy objects to a new location they are completely dis-assembled to avoid personal injury or damage to the furniture. Please be careful to retain all fittings when doing this.

### CHAIR SPECIFIC WARNINGS:

Never tilt the chair. Ensure the chair is always placed firmly on the ground.

### IMPORTANT SAFETY NOTE:

Do Not:  
Use the stool as a ladder.  
Climb on the stool.  
Stand on the foot-rest of the stool, as this could lead to the stool becoming unbalanced and overturning.


### WARNING:

- Do not sit on the armrest or chair footstool/ ottoman.
- Do not stand on the chair footstool/ ottoman.
- Do not use the chair footstool/ ottoman as a step ladder.
- Do not use this chair unless all bolts, screws and knobs are firmly secured.
- At least every 4 months – check all bolts, screws and knobs to be sure that they are tight.
- If parts are missing, broken, damaged or worn – stop use of the product until repair are made, using factory authorized parts only.
- For further information see care manual and assembly instruction.
- Failure to follow these warnings could result in serious injury.

**PLEASE KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE**




## CONGRATULATIONS

You are now the proud owner of Nordic Office. We are confident you will feel the same as you enjoy the comfort and style of your new furniture.

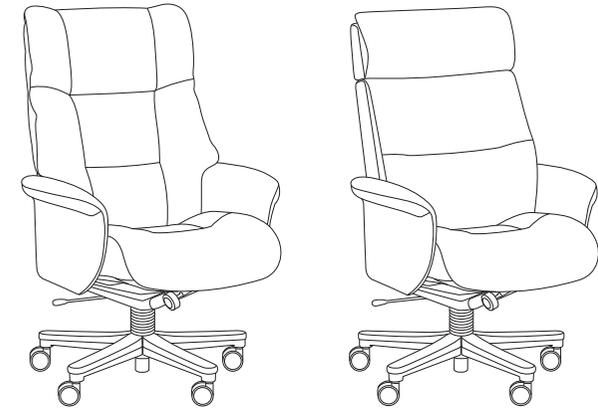

### IMPORTANT


Read this and other relevant instructions before using the product. Keep this manual for future reference.

BODY PART	
<b>I</b> Body x 1	
<b>II</b> Armrest x 1	
<b>III</b> Base x 1	
<b>IV</b> Gas Lift x 1	
<b>V</b> Plastic Bellow x 1	
<b>VI</b> Clip spring x 2	
<b>VII</b> Screw M8x50 x 1	
<b>VIII</b> Screw M6 x 6	
<b>IX</b> Hex key x 1	

## ASSEMBLING THE SOFT PART ON TO NORDIC OFFICE BASE


### STEP 1

Start by attaching the Gas Lift (IV) to the center of the base (III).

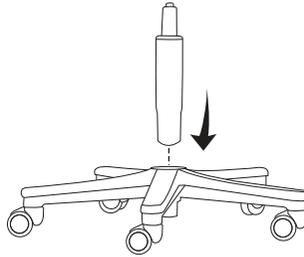

### STEP 2

Place the Plastic Bellow (V) around the Gas Lift (IV)

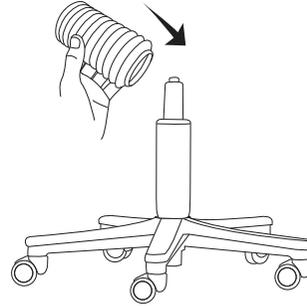


### STEP 3

Attach body (I) to the base by sliding it on to the gas lift.



### STEP 4

Take pin (VII) out by first sliding out clip spring (VI) and place it on the floor.

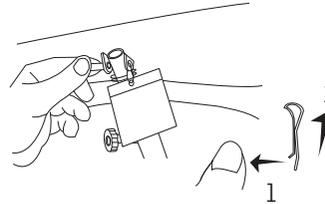


### STEP 5

Turn backrest back to the floor.




### STEP 6

Attach armrest(II) by first entering one M6 screw (VIII) by a couple of turns only into top hole and sliding the arm into the slot on the frame. Screw in and tighten the next two M6 (VIII) screws before tightening the top screw again with hex key (IX).

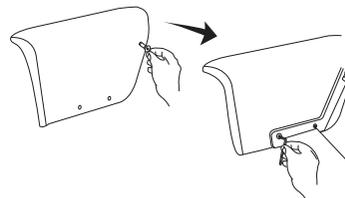


### STEP 7

Go behind the chair and hold the seat as shown in the drawings. Connect seat and back by either standing straight behind or on the side of the chair back.

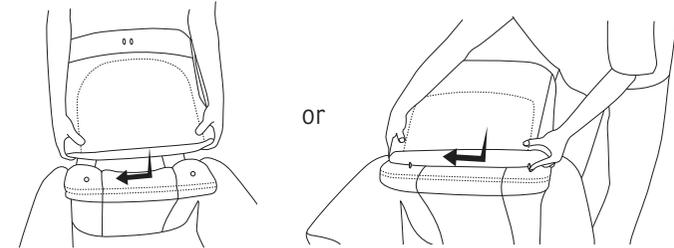

### STEP 8

Connect seat to backrest by sliding holes on seat onto pegs on backrest. Note: one peg is longer to make lining up holes easier. Fasten clip spring (VI) into slot on the short peg.

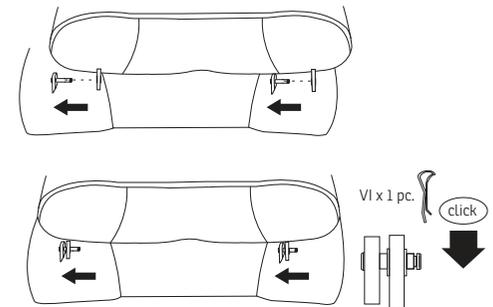

### STEP 9

Fold seat/backrest assembled to upright position.

